


## LL RECESSED DOWNLIGHT PWM24V

are square/ round/ rectangular high-power downlights with efficient LED technology.

The recessed downlights are used in commercial lighting for general illumination and accent lighting.

### Dimensions

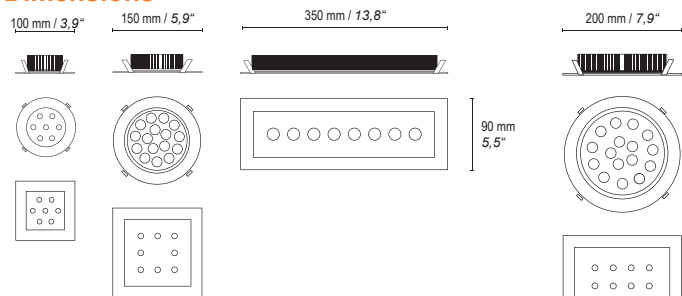

### Installation



### Installation



### Technical specification

Lifetime	75.000 hours (70% lumen maintenance at T <sub>a</sub> = +25°C (77°F))
Power connection	DC24V 2m cable with 6pin LINE connector
Ambient temp. (Ta)	max. +40°C (104°F)
Cooling	Conventional
Installation	Recessed

### Standard configurations

LL	RDW	LR10	SI	I20	07	12W	060	40K	C80	
Type	Connection	Shape & Dimension		Product color	IP rating	LED number	Power input	Optic	Color temperature	CRI
RDW: RECESSED DOWNLIGHT	L: PWM 24V or DC 24V	R: Round 10: Ø 100mm 15: Ø 150mm 20: Ø 200mm S: Square 10: 100mm x 100mm 15: 150mm x 150mm 20: 200mm x 200mm L: Rectangle 35: 350mm x 90mm		SI: RAL9006 BL: RAL9005 W: RAL9010 GR: RAL7035	I20: Indoor IP20	07: 7x LED 08: 8x LED 16: 16x LED 24: 24x LED	12W ... 36W	010: 10° 020: 20° 030: 30° 040: 40° 060: 60° 080: 80° 120: 120°	40K: 4000K	C80: CRI 80

Other configurations - special order



### Applications

- Shopping malls
- Public areas
- Schools
- Museums, galleries
- Office, lobby ...



Operate with DRIVER:



### Basic range

#### LL RECESSED DOWNLIGHT PWM 24V

LL RDW LR10-SI-I20-07-12W-080-40K-C80
LL RDW LS10-SI-I20-07-12W-080-40K-C80
LL RDW LR15-SI-I20-16-24W-060-40K-C80
LL RDW LS15-SI-I20-08-12W-060-40K-C80
LL RDW LR20-SI-I20-16-34W-060-40K-C80
LL RDW LS20-SI-I20-16-24W-060-40K-C80
LL RDW LS20-SI-I20-24-36W-060-40K-C80
LL RDW LL35-SI-I20-08-12W-060-40K-C80