


# LL GRAPHIC PANEL DMX

PRODUCT SHEET



Dynamic color and graphic variations

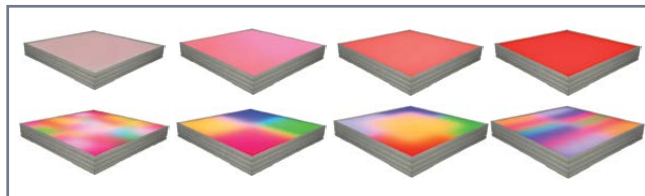

## Decorative lighting

LL GRAPHIC PANEL is high brightness diffuse panel. Each graphic point can be controlled separately (36 graphic points). It's possible, by lighting control, to generate innumerable lighting scenes and effects and intersect them each other.

The combination of more luminaries enable creation of graphic spaces and elements, generating the dominant and great scenes point.

It is compatible with DMX512 for any lighting and graphic effects. It simplifies installations by discovering and addressing lights in a network.

### Features

- RGB additive LED technology
- Extremely deep colors and maximum homogeneity
- Continuously variable intensity 0 – 100 %
- Low power consumption, high total efficacy, long lifespan

### Application

- Decorative lighting
- Luminous colored walls and ceilings
- Graphic effects and animation



## TECHNICAL SPECIFICATION

### Electrical data

Input voltage	90 – 264 V AC, 47 – 63 Hz, 127 – 370 V DC
Power	60 W

### Light source

	144 x LED
Exchangeable	no

### Photometrical data

Optic	Opal
Light Colour	Single Chip RGB
Lifespan	50.000 hours


### Operation conditions

Control data input	DMX 512
IP rating	Standard: IP20
Operation temperature	-30 ° C to +40 ° C
Cooling	Conventional

### Product data

Color	Standard: SI - RAL9006
Material	Aluminium
Weight	6,00 kg

## TECHNICAL DRAWING



## ORDER CODES

LL GP D600-144-60W-O-RGB-SC-I20-SI

## ACCESSORIES

LL GP HOLDER 600 SURFACE

## PHOTOMETRY

